


# How to register Toyota G chips Cloner Box

1: Login CN900 official website: <http://www.cn900.net> and download the newest update software.



2: please connect cn900 to PC, and power on, then open the



update software , click"CONNECT" button, it will display SN and version on the lower left corner of the window, it means the cn900 connect to normal. Form as below:

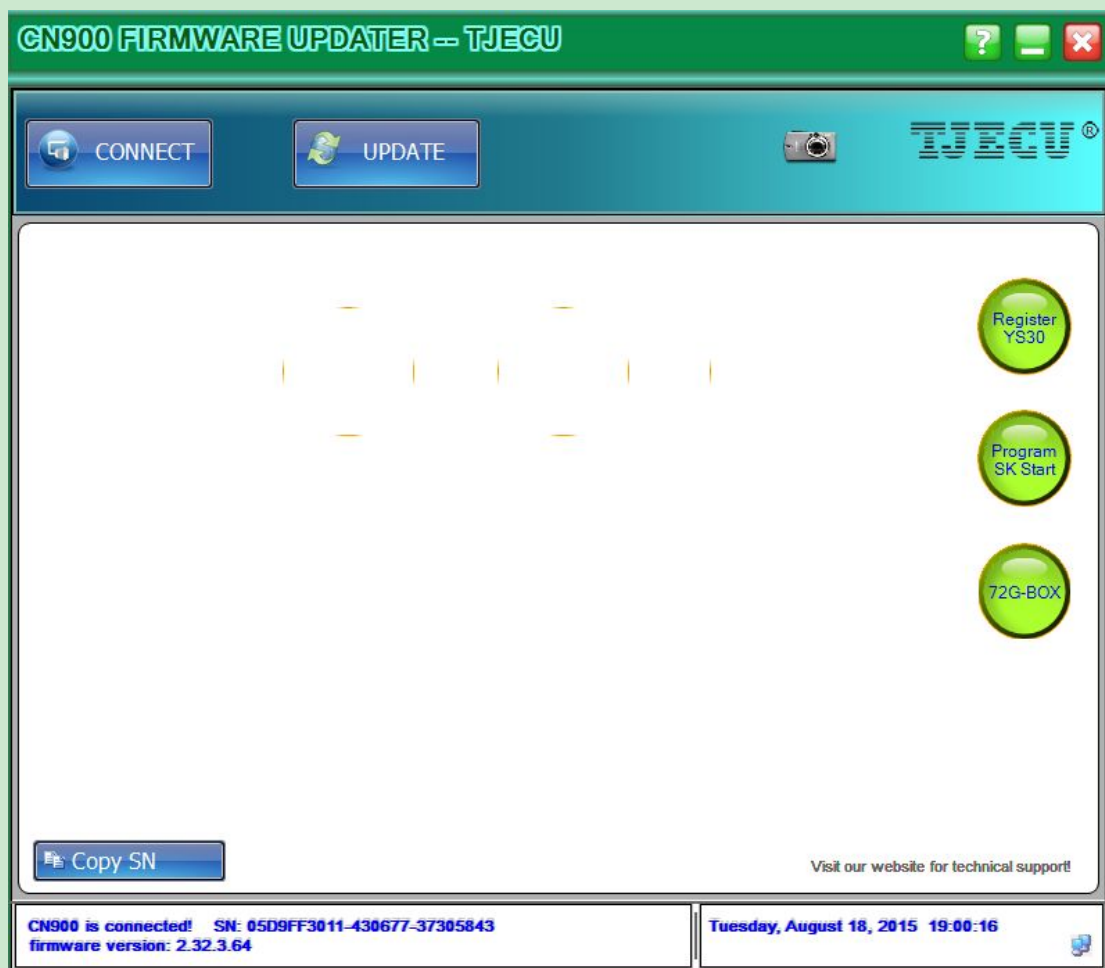

3: Click “UPDATE” button, update the main module of firmware

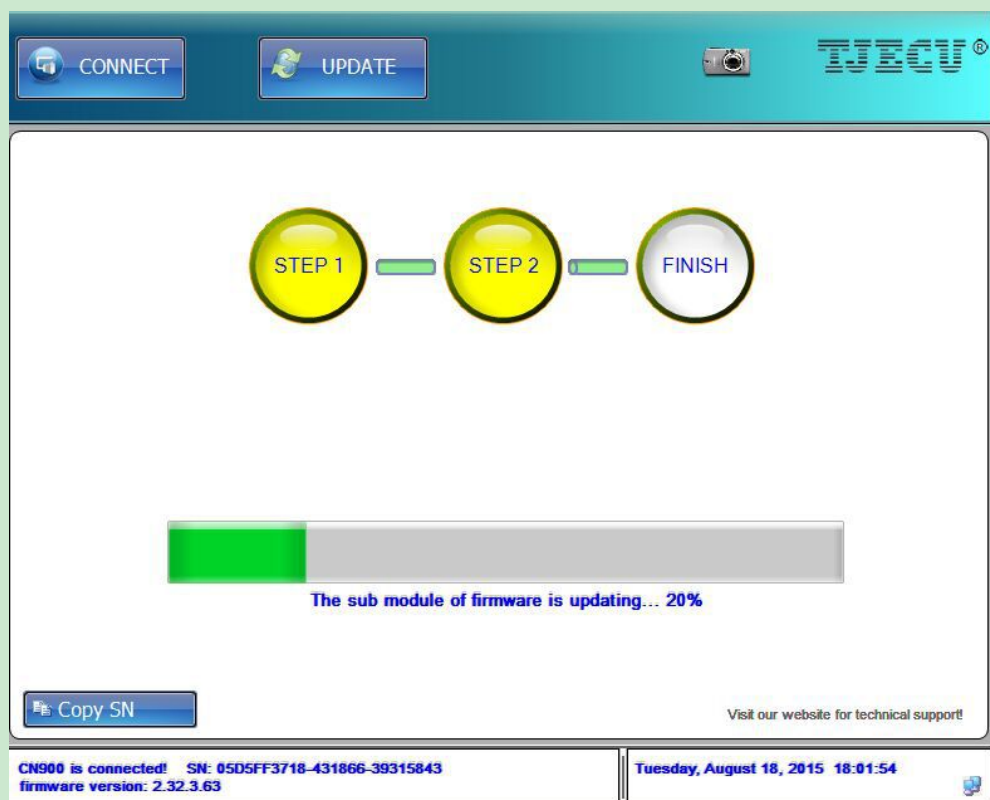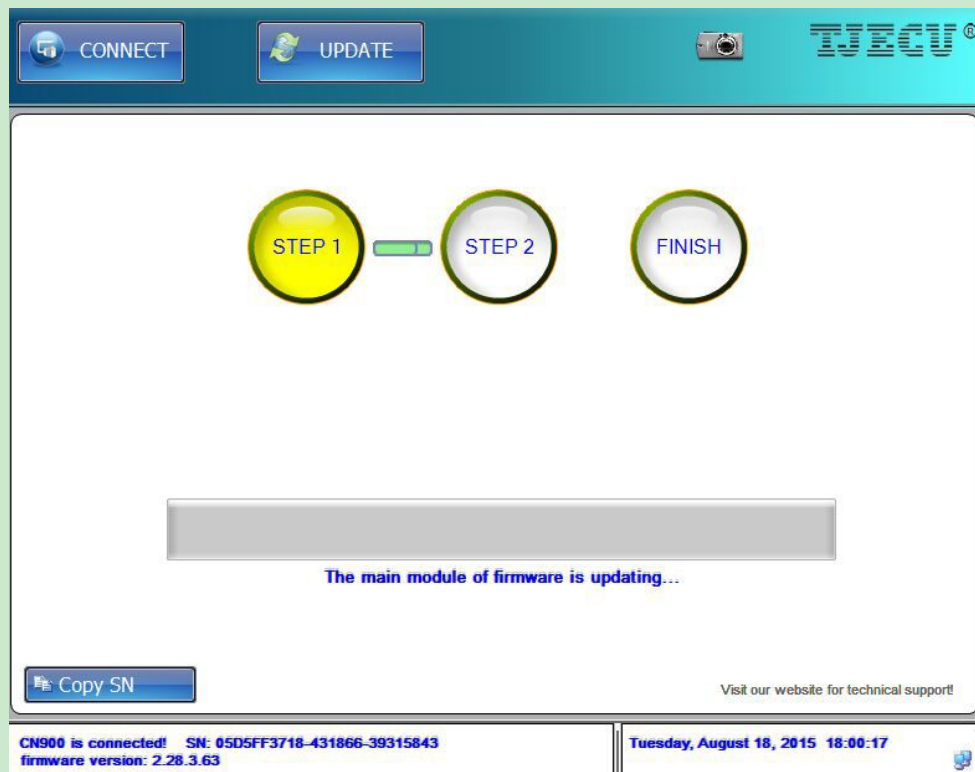

4: There are three steps for updating, please keep CN900 connecting well. After updating, the number of version will


change. Please contact Toyota G box to CN900, then click




“ ” you will see the picture as below:



- 5: How to identify the cn900 was registered Toyota G box or not? If the cn900 was not registered G box, please check picture 1; If the cn900 was registered G box, please check picture 2, it will display the Serial number of the G box. After registered successfully, this Toyota G box can not register to another cn900.

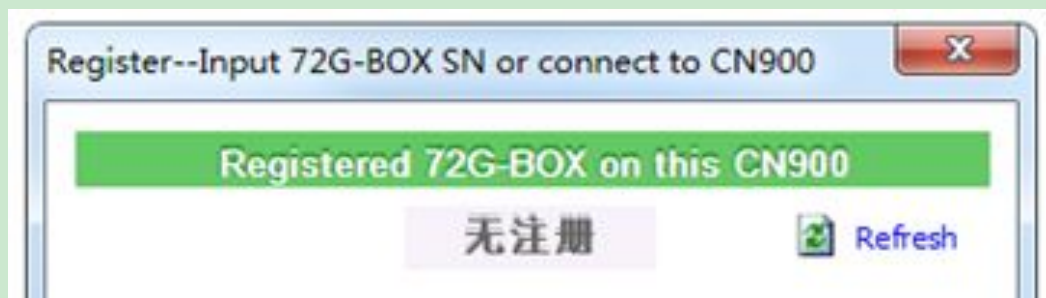

(Picture 1)

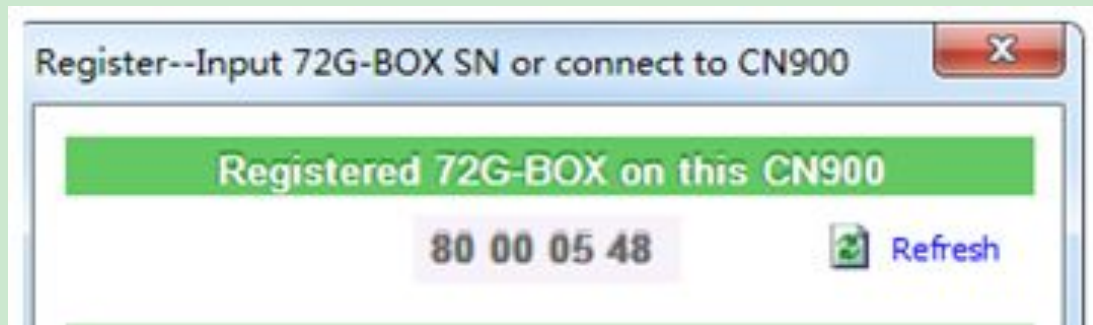


(Picture 2)

- 6: In the back side of the Toyota G box, you can see the serial number (picture 1), please input 8-digits into the edit box. (picture 2 and picture 3). Register successfully. (picture 4 and picture 5).



picture 1

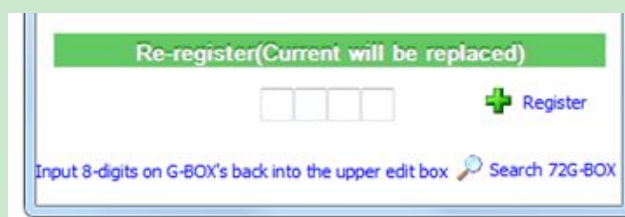

picture 2



picture 3



picture 4




picture 5


7: after registered successfully, please power off the cn900, then power on. Open the CN900 update software, Click” CONNECT” —click” 72G-BOX—click “Search72G-BOX” (picture 1), and test that whether the Toyota G box was connected well with cn900 (Picture 2). If register ok, it can work normally, if not, please re-register by steps.


Register--Input 72G-BOX SN or connect to CN900 X

**Registered 72G-BOX on this CN900**

**80 00 05 48**  Refresh

**Re-register(Current will be replaced)**


 Register

Input 8-digits on G-BOX's back into the upper edit box  Search 72G-BOX


picture 1


Register--Input 72G-BOX SN or connect to CN900 X

**Registered 72G-BOX on this CN900**

**80 00 05 48**  Refresh

**Re-register(Current will be replaced)**

 Register

Input 8-digits on G-BOX's back into the upper edit box  Search 72G-BOX

picture 2